

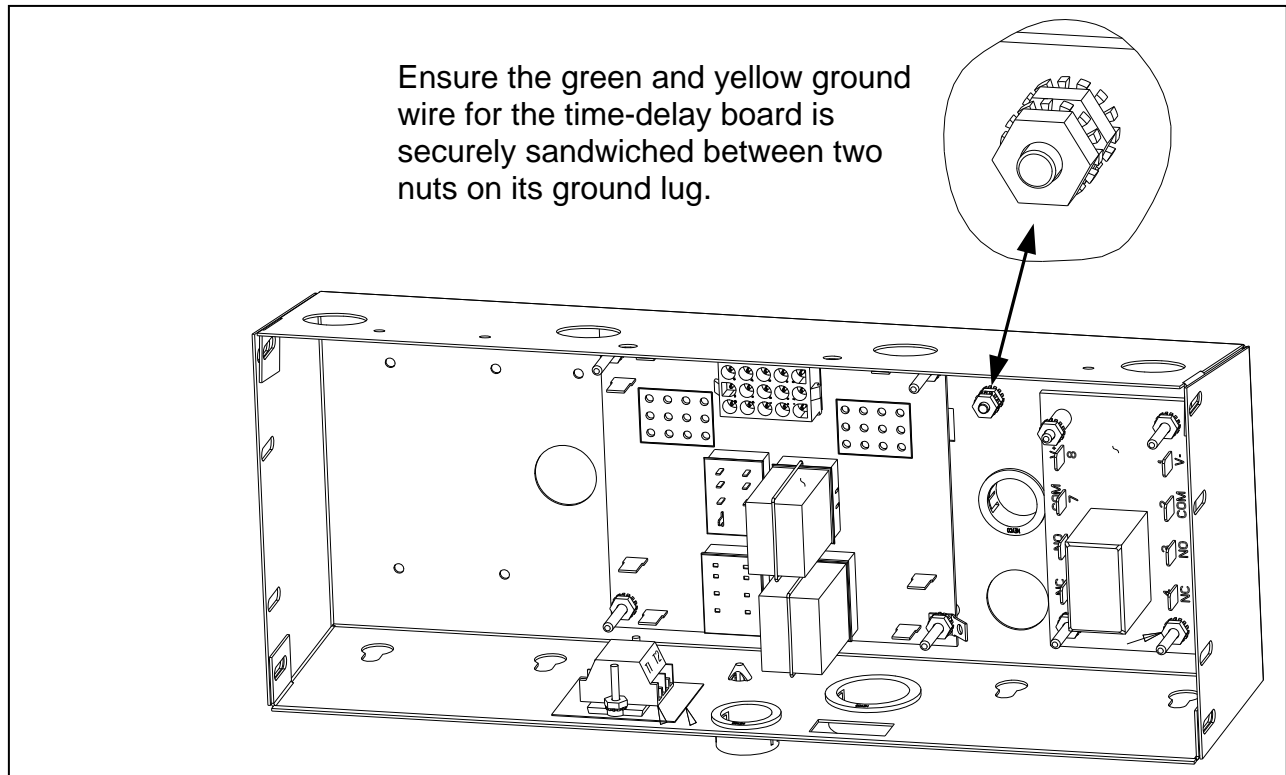


# Time-Delay Board Replacement

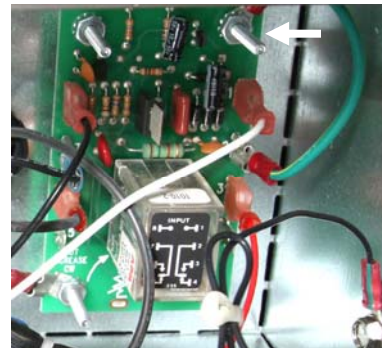

Follow these instructions when replacing a time-delay relay (807-4934 or 807-4812) in a LOV gas fryer:

1. Access the board in the right side of the control box in a full vat and on either side in a dual vat.
2. Mark wires to ensure they are returned to the proper stud.
3. Remove board and replace with new board, replacing wires.
4. Ensure the ground wire, either attached to a stud in the control box (above and left) or attached to a board mounting stud, is securely sandwiched between two nuts.

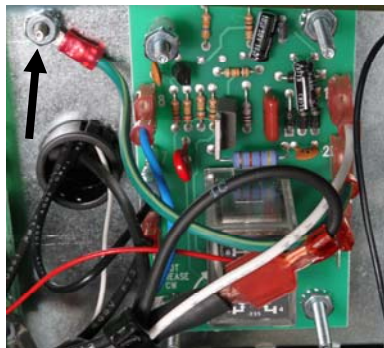

The time-delay relay board is shown in place above. The left photo shows the current placement of the mounting stud. The right photo shows the original grounding to a board mounting stud. Replacement of the board in either style grounding requires the ground wire terminal to be sandwiched between two nuts on the stud.