

Instruction Sheet

Follow these instructions to replace a UHCTHD Bezel/Heater Plate.

Subject: 8263719 UHCTHD Bezel/Heater Plate Kit Replacement Instructions

Models affected: Frymaster UHCTHD Touch Screen Cabinets

06/08/2022

1. Disconnect power from the cabinet.
2. Remove the four (4) screws that attach the top of the cabinet (see Figure 1).



Figure 1



Figure 2

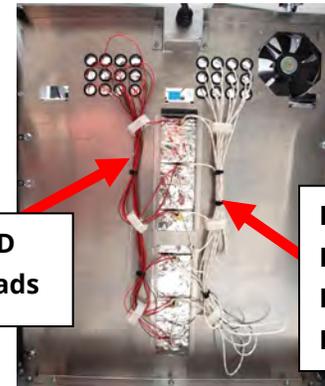


Figure 3

3. Remove both sides, by removing the two (2) Phillips head screws at the bottom of each side panel and sliding the side up and away from the cabinet (see Figure 2).
4. The power heater plate and RTD wires are visible on the left side, as viewed from the front of the cabinet (see Figure 3).
5. Bolts secure the framework that holds the heater plates; Allen screws secure the bezels (see Figure 4). A third fastener, a small screw also secures the bezel. It must be removed to get to the heater plate (see Figure 5). The complete slot assembly must be removed to replace the heater plate.



Figure 4



Figure 5

6. Newer bezels require some extra steps to remove detailed in the following steps. Removing the newer bezels, which seal better than previous bezels, will be unusable after removal and **MUST** be replaced with the bezels included in the kit.

In This Kit		
Part #	Description	Qty
8105102	BEZEL, UHCT	4
8076423	PLATE, HEATER UHC-T	1
8197997	BEZEL/HEATER PLATE INSTRUCTIONS	1

7. Locate the affected heater and remove the associated bezel(s) using channel lock pliers to squeeze starting at the center and pulling down while squeezing (see Figure 6). Repeat process on the right side of the bezel (see Figure 7). Finally repeat on the left side of the bezel (see Figure 8) to snap and detach the bezel(s) (see Figure 9). Repeat the process on the rear bezels. It may require inserting a screwdriver into the side hole(s) to push the bezel out (see Figure 10).



Figure 6



Figure 7



Figure 8

8. RTD probe connections (brown and red) are at the bottom of the IO board (see Figure 11). Heater plate connections (white and blue) are at the top of the IO board. Mark plugs for reassembly. Pay close attention to their placement. Disconnect the heater plate and probes associated with the affected slot.



Figure 9

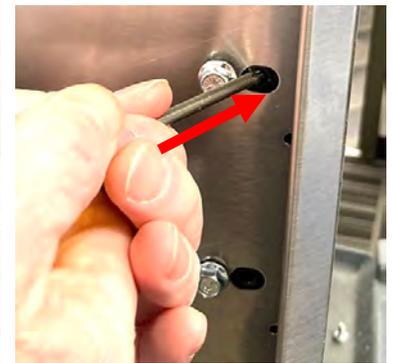


Figure 10

9. Raise heater plate and slide out the insulation under the plate to gain access to heater.
10. Route the power coupling through the cabinet interior.
11. Carefully remove the heater plate from the cabinet.
12. Replace the heater plate.
13. Reverse the steps to reassemble the cabinet.

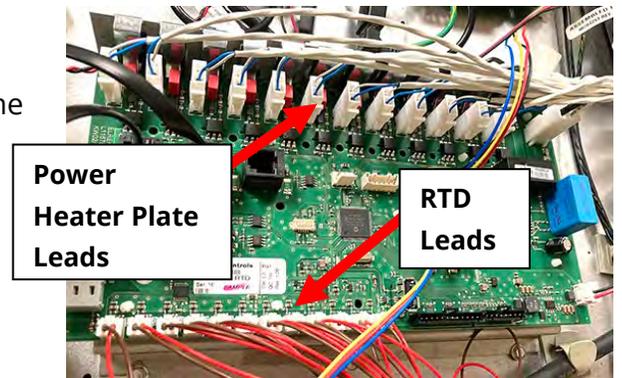


Figure 11