


# Instruction Sheet

Follow these instructions to install  
 Waste ONLY Dispose Kits.


1. Disconnect power and gas from the fryer.
2. Remove the fryer from the hood to gain access to the rear of the fryer.
3. Remove the left side by removing the left door first. Remove the left door by pushing up on the lower hinge pin, with a screwdriver or similar object until the door can be removed (see Figure 1).
4. Loosen the three (3) screws on the front of the left side (see Figure 2).
5. Loosen the screw from the center bottom of the left side (see Figure 3).
6. Loosen the four (4) screws on the lower rear back and the four (4) lower screws on the upper rear back (see Figure 4).




**Figure 1**

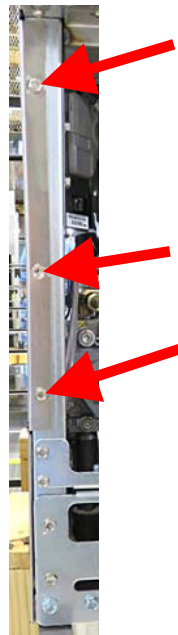

**Figure 2**



**Figure 3**

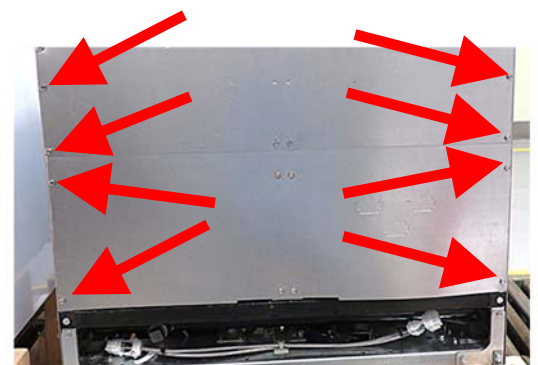

**Figure 4**

**Subject: 8263498 Waste Bulk Oil Kit Installation  
 Instructions (Gas)**

**Models affected: FilterQuick Touch FQG30-T Gas  
 Fryers**

In This Kit		
Part #	Description	Qty
1080686	HANDLE & LOCK ASSY, GAS LOV RTI	1
1085398	HARNESS, UNIVERSAL BULK OIL	1
1085785	FILL ASSY, FLT QCK BULK OIL	1
1085907	PLUMBING, FQ GAS BULK OIL	1
8022609	TAG, DISPOSE RTI	1
8130331	ELBOW, 1/2NPT W/SIDE OUTLET BM	1
8130298	NPPL, 1/2NPT X 2.00 BM	1
8130087	NPPL, 1/2NPT X 1 1/2 BM	1
8130062	ELBOW, 1/2 90DEG BM	1
8101668	ADAPTER, MALE 5/8"O.D. X 1/2"	2
8091070	BOLT, 1/4-20 X 5/8 SQ CONE LOCK	3
8090417	NUT, FLNG 1/4-20 SERR	4
8090412	SCRW, #10-1/2 HX WSHR HD N	6
8238991	WRENCH W/A, 1-1/16" CRWS F	1
8140015	TY WRAP	8
8076105	HARNESS, DISPOSE/PAN SW/BULK	1
8197528	INSTRUCTIONS	1

7. Lift upward on the side to remove (see Figure 5).

8. Remove the filter pan (see Figure 6).

9. Remove the filter pan lid by lifting up on the collar, around the drain tube, while pulling on the filter pan lid (see Figure 7).

10. Remove the splash shield on the left side of the transformer box, as viewed from the front of the fryer, by removing the two (2) screws connecting the shield to the frame (see Figure 8).

11. Remove the splash shield on the right side of the transformer box, by removing the two (2) screws on the rear and the two (2) screws on the front (see Figure 9).

12. Disconnect all connectors on both sides of the front of the transformer box (see Figures 10 and 11).

13. Remove the two (2) vinyl caps from the studs of the transformer box (see Figure 12).

14. Using a 7/16" inch wrench, remove the nuts securing the transformer box. Lower and set aside (see Figure 13).

15. Remove the lower back by removing the eight (8) screws (see Figure 14).

16. Disconnect the flexline from the check valve, connecting the oil manifold to the filter pump (see Figure 15).

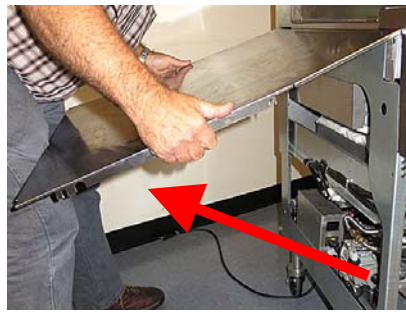


Figure 5




Figure 6

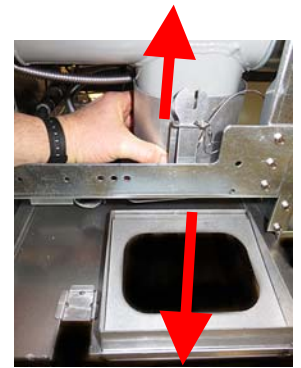


Figure 7



Figure 8

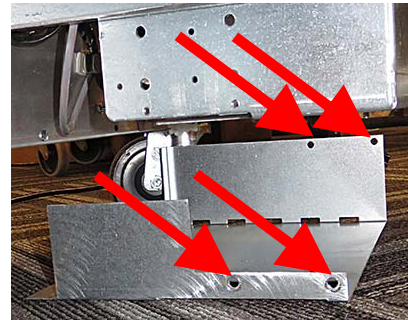


Figure 9



Figure 10

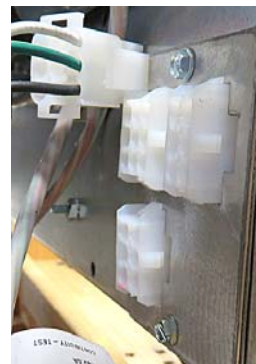


Figure 11



Figure 12



Figure 14



Figure 13

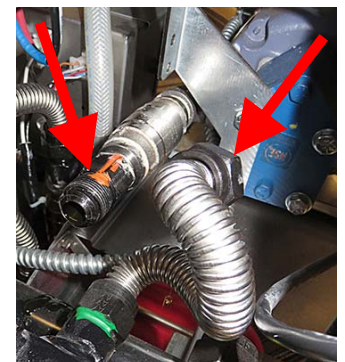


Figure 15



17. Use a 7/16" wrench to remove the nut and bolt from the filter pump shipping bracket (see Figure 16).
18. Use a 1/2" wrench to remove the two (2) bolts securing the filter pump bracket to the filter pump (see Figure 16). Discard the bracket.
19. Reinsert the two (2) bolts into the filter pump and tighten. Torque to 15 foot lbs. Do **NOT** overtighten.

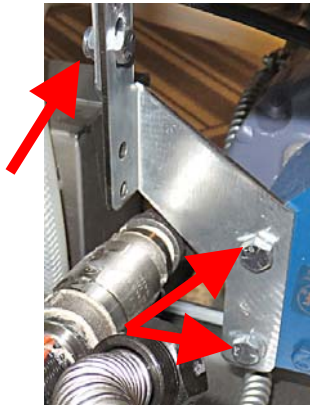


Figure 16



Figure 17

20. Remove the flexline adaptor and check valve from the filter pump (see Figure 17).
21. Remove the check valve fittings and the 90° elbow from the filter pump (see Figures 18 and 19). It may be necessary to loosen all four (4) filter pump bolts, to ease removal of the elbow and check valve fittings. When finished, retighten the bolts, but do **NOT** overtighten.
22. Apply Loctite and insert 1½" nipple (8130087) into the 90° elbow with outlet (8130331) and tighten and orient as shown (see Figure 20).

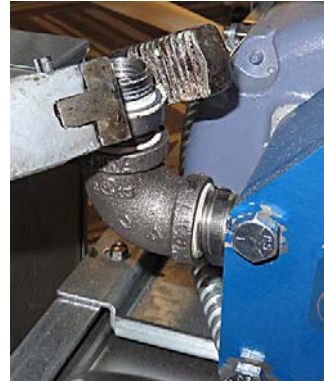


Figure 18

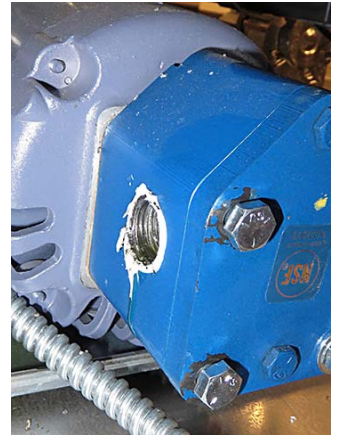


Figure 19

23. Apply Loctite to both ends of the 2" nipple (8130298). Insert the nipple into the top of the elbow, attached to the pump, in the previous step (see Figure 21).

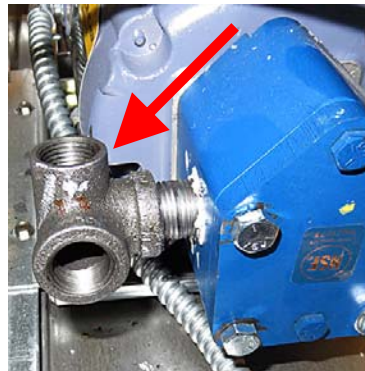


Figure 20

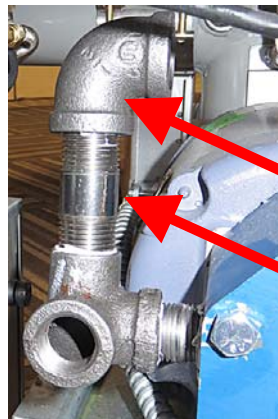


Figure 21



Figure 22

24. Attach the 90° elbow (8130062) to the top of the nipple in the previous step. Tighten and orient as shown (see Figure 21).
25. Attach flexline adaptor (8101668) to elbow in previous step and orient as shown (see Figure 22).
26. Attach the check valve fittings, check valve, and flexline adaptor, removed in steps 20 and 21, to the bottom opening of the elbow as shown (see Figure 23).



Figure 23


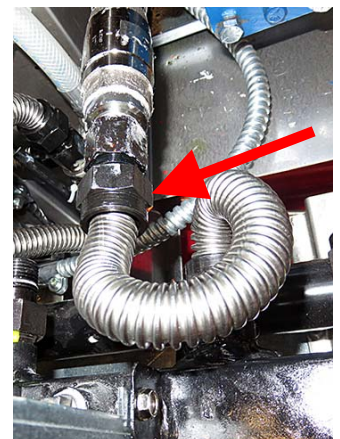


Figure 24

27. Reattach the flexline disconnected in step 16 (see Figure 24).

28. Locate the 1085907 Bulk Oil plumbing assembly. Facing the switch connectors, attach the 8076105 harness to the Bulk Oil Plumbing assembly. Beginning with the switch on the left, attach the red wire to the farthest left connector; next attach the green wire, to the connector directly to the right of the red. On the right switch, attach the black wire to the farthest right connector; attach the white wire to the connector left of the black wire (see Figure 25).

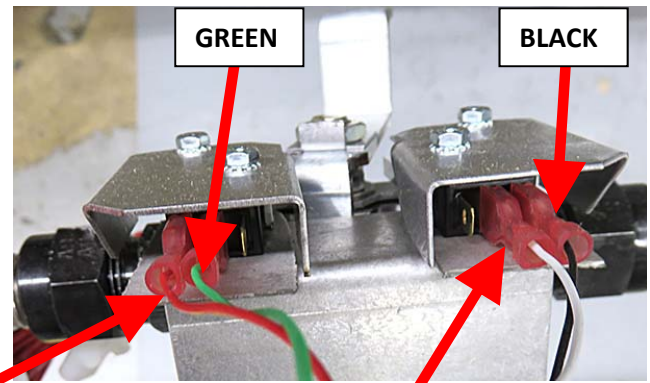


**RED** **Figure 25**

**WHITE**


29. With the dispose valve handle oriented away from the filter pump, insert the bulk oil plumbing assembly into the cabinet. Ensure the flexline connected from the pick up tube to the filter pump, is beneath the bracket of the plumbing assembly.

30. Using a 7/16" wrench, attach the switch assembly to the four studs on the filter pump mounting plate using 4 - 1/4"-20 nuts (see Figure 26).

31. Using Figure 27 below as a guide, route the flexline #1 over the pump and attach to the outlet of the filter pump (see Figure 28).




**Figure 26**

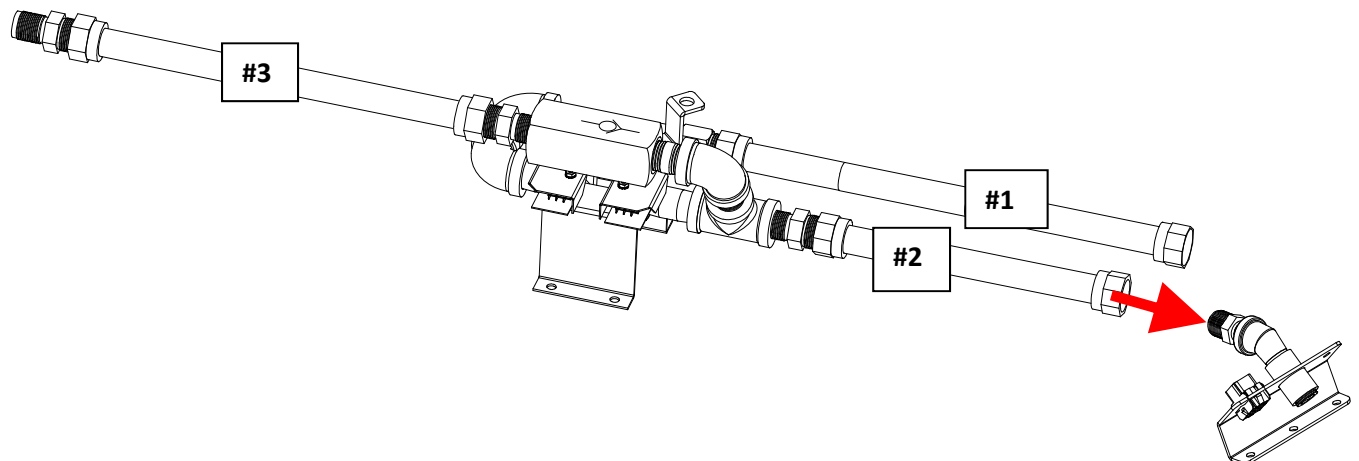

**Figure 27**

32. Remove far right nut and bolt, as viewed from the rear of the fryer, attaching the return oil manifold to the frame (see Figure 29).

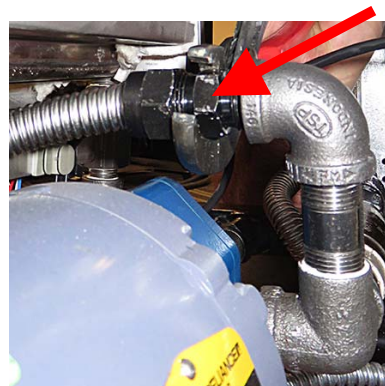

**Figure 28**



**Figure 29**



33. Using a prybar, lift the oil manifold up slightly to allow the oil dispose assembly 1087707 to slide in between the gas and oil manifolds (see Figure 30).

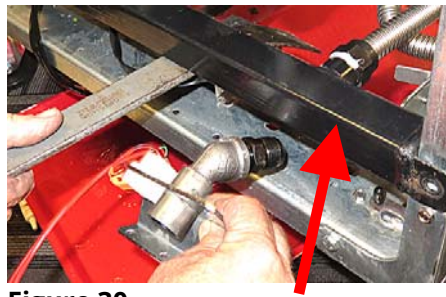


Figure 30

34. Attach the flexline #2 from the dispose switch assembly in Figure 27, to the dispose outlet assembly (see Figure 31).

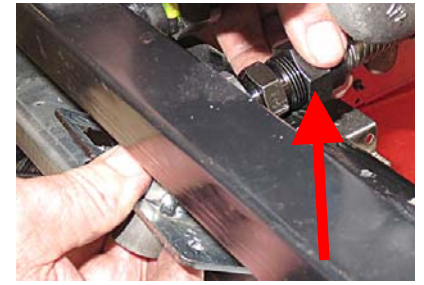


Figure 31

35. Detach the electrical connector from the dispose assembly. Position over the pre-drilled holes (see Figure 32).

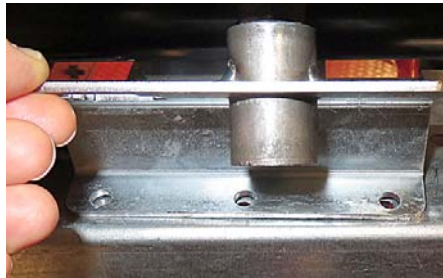


Figure 32

36. Replace the bolt and nut removed in step 32 (see Figure 29).



Figure 34

37. Unplug the 12-pin connector from the rear of the FIB (ATO) box (see Figure 33).

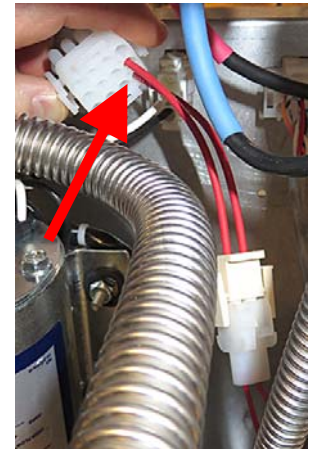


Figure 33

38. Locate the 8076105 wire harness. If the revision of the harness is revision A or B, proceed to the next step. If the revision is C or later, skip to step 45 (see Figure 34).

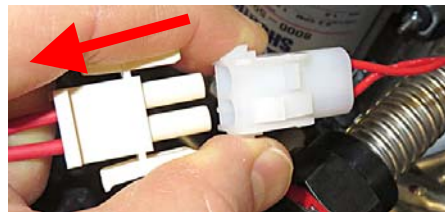


Figure 35

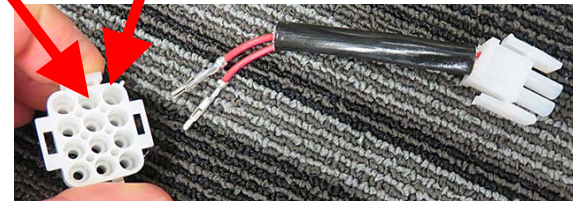


Figure 36

39. Unplug the 2-pin connector on the other end of the 12-pin connector from step 37 (see Figure 35).




Figure 37  
Viewed from the  
Rear

40. Using a pin pusher, push pins 1 and 2 out of the 12-pin connector and set aside for later use (see Figure 36).

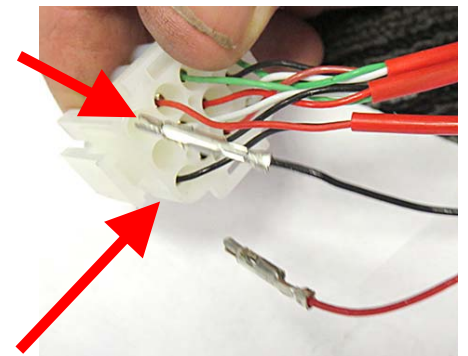


Figure 38

41. Using a pin pusher, push pins 1 (black) and 2 (red) out of the 12-pin connector on the new 8076105 harness and discard (see Figures 37 and 38). Pin 1 is located by looking for the protruding ridge which is adjacent to Pin 1.



Figure 39

42. Using the 2-pin connector removed in step 40, insert the pins into positions 1 and 2 of the 12-pin connector in step 41 (see Figure 39).

43. Insert the 9-pin female connector into the dispose assembly (see Figure 40).

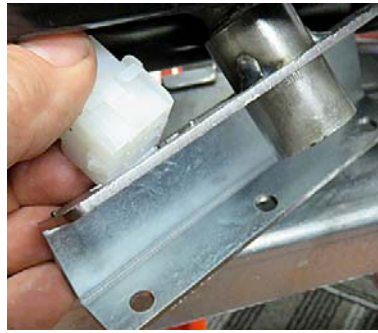


Figure 40

44. Align the dispose outlet assembly to the pre-drilled holes and attach using 1/4"-20 self tapping bolts (see Figure 41).

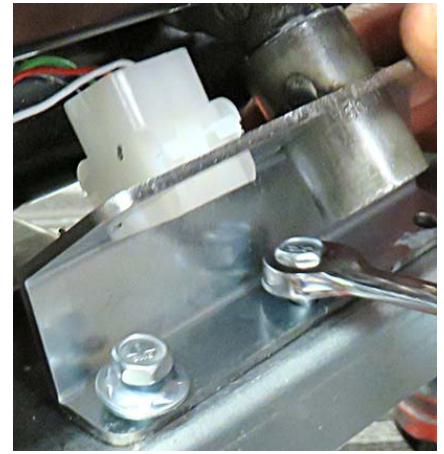


Figure 41

45. Attach the 1085398 9-pin male connector to the 9-pin female connector (see Figure 42).




Figure 42

46. Connect the 8076105 12-pin connector to the rear of the FIB (ATO) box (see Figure 43).

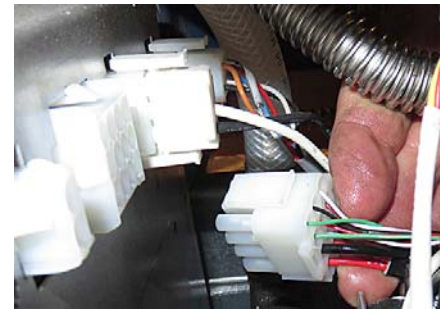


Figure 43

47. Zip tie excess wiring to gas manifold (see Figure 44). Do **NOT** tie wires to the oil return manifold.



Figure 44

48. Using zip ties, attach (DISPOSE) tag to the waste oil port on the right side of the fryer, as viewed from the rear (see Figure 45).



Figure 45

49. Remove the plug from the rear of the drain tube (see Figure 46).

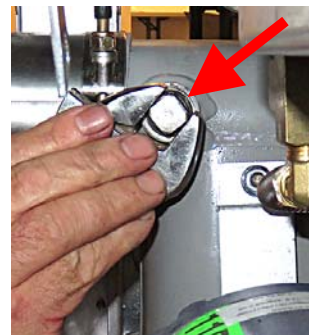


Figure 46

50. Insert flexline adaptor 8101068 into the port in the rear of the drain tube and tighten (see Figure 47).




Figure 47

51. Attach the #3 flexline (see Figure 27) from the check valve to connector attached to the drain tube in the previous step (see Figure 48).



Figure 48

52. Attach the dispose handle assembly 1080686 to the dispose switch valve assembly with the clevis clip (see Figure 49).

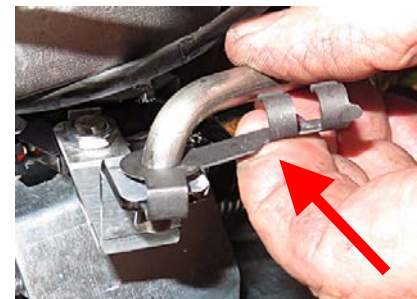



Figure 49

53. Attach the dispose valve bracket to the frame (see Figure 50).



54. On the rear of the fryer, remove the plug and connect the waste oil hose to the DISPOSE port.
55. Use the wiring diagram on the back page for reference when attaching any wiring from an external bulk system. Connect the wiring to the harness next to the DISPOSE connector, on the rear of the fryer (see Figure 42).
56. Reverse steps 1-15 to return the fryer to operation.
57. Once fryer has powered up, wait one (1) additional minute with the controller OFF and press the HOME button. 

58. Press the SETTINGS button. 

59. Press the SERVICE button. 

60. Enter **3000**.


61. Press the √ (check) button.

62. Press the down arrow button one time. 


63. Press WASTE OIL if connecting to bulk waste oil system.

64. Press BULK.

65. Press the √ (check) button.

66. Press the HOME button to exit. 

67. Press and **HOLD** the momentary reset switch. Ensure the switch is pressed and held for **one (1) minute**. On some gas units, the button may be located under the far-left control box. On newer gas and units, the switch is located close to the USB port.



**Figure 50**

68. Test the dispose function by pressing the FILTER button .

69. Select DISPOSE from the menu.

70. The controller displays DISPOSE NOW? YES NO.

71. Press the YES button.

72. The controller displays WEAR PROTECTIVE GLOVES; YES.

73. Press the YES button.

74. Press the BLUE button.

75. Controller displays VAT EMPTY?

76. Press the YES button.

77. Controller displays CLEAN VAT COMPLETE?

78. Press the YES button.

79. Controller displays ALERT DRAIN...OPEN DISPOSE VALVE.

80. Open the dispose valve by pulling the handle towards the front of the fryer (see Figure 51).

81. Ensure that the filter pump starts and begins pumping oil out of the filter pan. If so, immediately push dispose handle in to stop the pump. Reboot the fryer system. Once the system is rebooted and all prompts are correctly answered, press the FILTER button and select the FILL VAT FROM PAN option to return the oil to the vat. Ensure that the oil is returned. It may be necessary to top off the vat when finished for the vat to heat properly.



**Figure 51**

# BULK OIL WIRING

FIB BOX  
C7

