

Instruction Sheet

Follow these instructions to install the boil out adaptor plate.

**Subject: 8263960 FQE80 Boil Out Adaptor Plate
Installation Instructions**

Models affected: FQE80 Touch Screen Fryers

6.22.26

1. Remove the right and middle screws from the filter pan lid (see Figure 1).
2. Align the new adaptor catch plate to the two open screw holes from step 1. Attach the new plate using included screws or the screws from step 1 (see Figure 2).

In This Kit		
Part #	Description	Qty
130021147	CATCH, BOIL-OUT FQ80/SCF63	1
8090361	SCREW, DRILL #8X1/2	2
8090412	SCREW, #10 - 1/2	2
8198101	INSTRUCTIONS	1

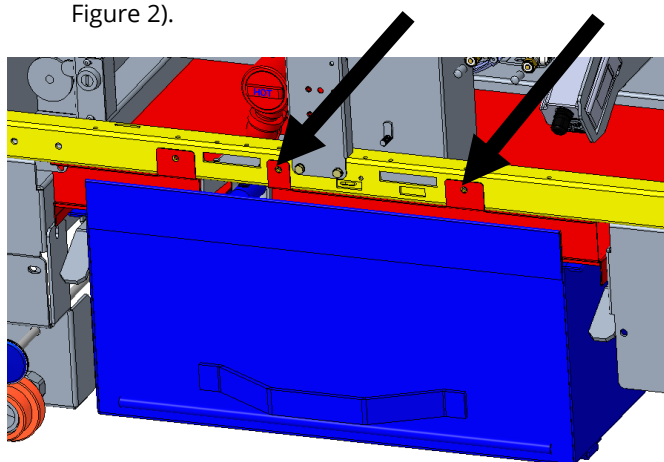


Figure 1

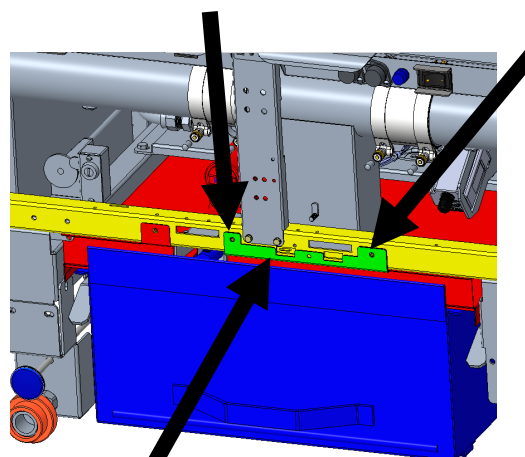


Figure 2

3. Using an included self-tapping drill screw, drill and add screw to the center hole in the bracket (see Figure 3).
4. Attach the boil out hose to the drain by hooking the boil out hose plate over the lip on the back side of the square oil drain spout, rotate the plate up in the front and secure in place with two latches to the new bracket (see Figure 4).

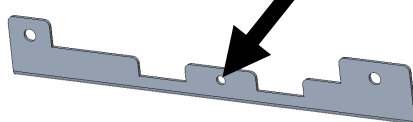


Figure 3

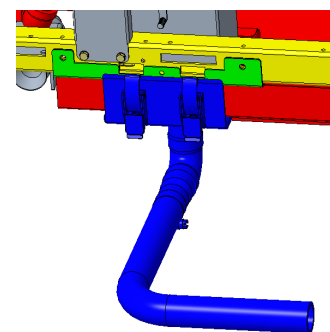


Figure 4