



# LOV-T™ Quick Start:


**A: M4000:** Programmable for automatic filtering. Press ✓(YES) button to respond YES to filter prompt.

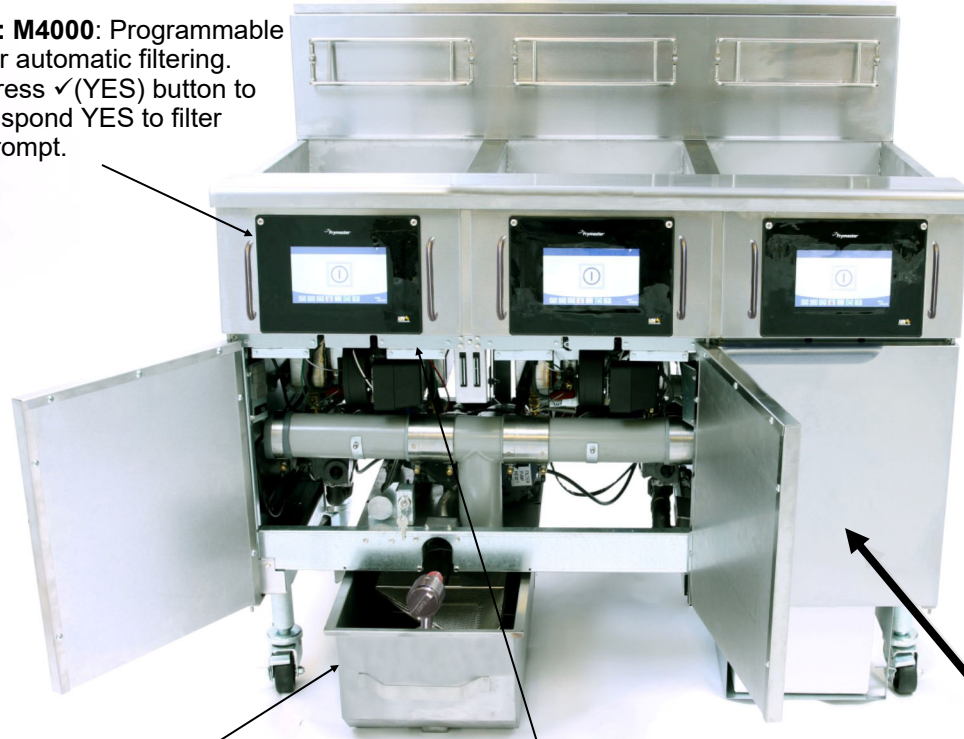

**C: Filter Pan**

**B: Power switch:** One in cabinet under each controller (not shown domestic electric only).

1. Fill vats with oil/ shortening to lower fill line.
2. Turn on power switches if applicable (**B**).
3. Turn controllers on by pressing and holding the  button for two seconds.
4. Controller (**A**) displays “CHANGE FILTER PAD? YES/ NO”.
5. Press ✓ (YES) and controller displays “REMOVE PAN”.
6. Remove filter pan (**C**) and controller displays “CHANGE FILTER PAD”.
7. Change filter and reassemble filter pan, ensuring pan is out 30 seconds. Re-install filter pan.
8. Position oil/shortening container in the right cabinet, placing pick-up tube in open container (**E**).
9. Press and hold the top off reset switch until yellow indicator goes out on controller. (**D**).
10. A “P” indicates the filter pan is not properly placed. Re-seat the filter pan if necessary.
11. While cooking, respond YES to the Filter Now prompt in display (**A**) by pressing the ✓ (YES) button.
12. Respond to the empty oil container yellow indicator light by replacing the oil/shortening container (**E**) and resetting the top off reset switch (**D**) or refilling the oil container with bulk oil system.

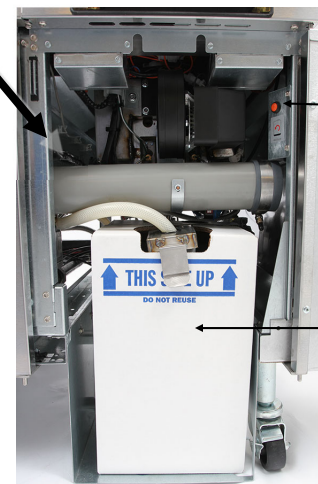

**D: Top off reset button:** Press and hold after replacing the oil/shortening until yellow indicator goes out.

**E: Oil/Shortening Container:** Holds oil/shortening for automatic top-off system. It's not used to fill the vats, just to maintain the oil level. Use only fresh oil in top off system.

**Frymaster®**

**LOV**  
Low Oil Volume Fryer

**NOTE:** The Frymaster LOV-T™ fryer requires a start-up, demonstration and training before normal restaurant operations can begin.

# Daily Filter Pan Cleaning and Preparation

The filter pad/paper in a LOV™ fryer must be replaced at least once daily. In high-volume stores it should be replaced more often.




1



2

Replace O-rings every 90 days.

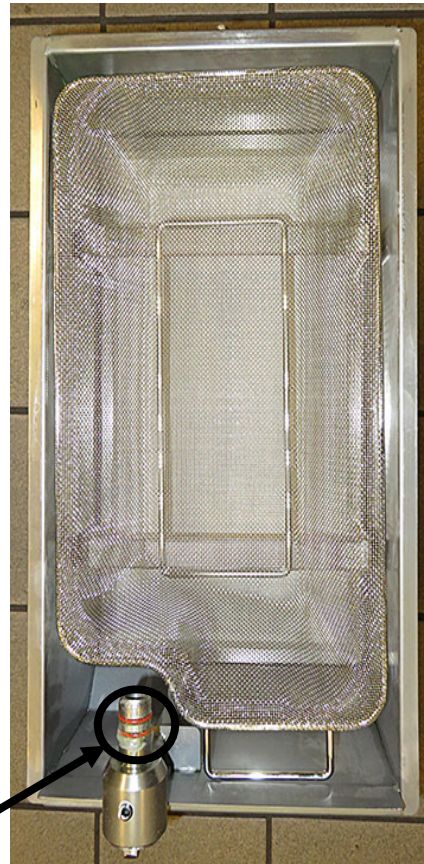

3



4

The filter pan must be cleaned daily and the filter pad/paper replaced. Follow these instructions to prepare the filter pan:

Remove and disassemble the pan. Discard old filter pad/

paper. Clean thoroughly. Leave no water in the pan.

Reassemble the pan in this order:

1. Position the inner screen.
2. Place the filter paper, or if using a filter pad, textured

side up, in the pan.

3. Position the hold-down ring on the filter pad/paper.
4. Position the crumb tray.
5. Firmly seat the filter pan in the cabinet. Ensure the controller does not display **P**.